



HC009S /EXT DAGSLYSSENSOR HF AV/PÅ UNIVERSAL

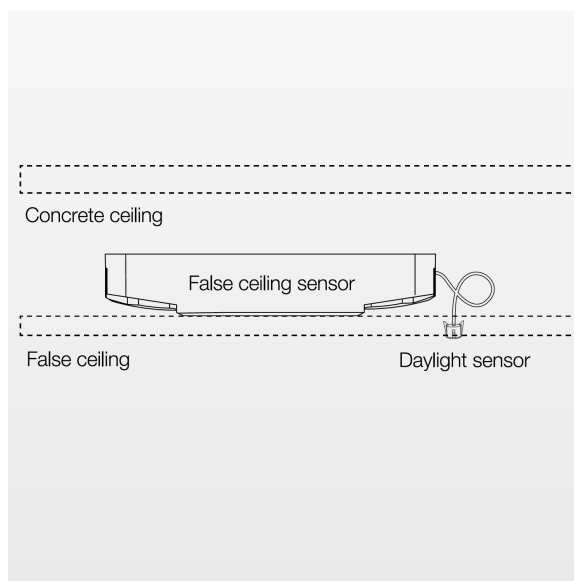

Universal dagslyssensor for montasje over himling. Av/På. Mulighet for synkronisering.

Art.nr.	LKA1961
Monteringshøyde:	Max 3
Deteksjonsområde (DxH):	12 x 3
Deteksjonsområde (%):	10% / 50% / 75% / 100% kan justeres
Holdetid:	2 s, 30 s, 1 min, 5 min, 10 min, 15 min, 20 min og 30 min, kan justeres
Switched power:	Maks 1200 W (resistiv belastning) Maks 400W (kapasitiv belastning)
Sensor-modus:	HF
Spenning:	220-240 V
Frekvens:	50/60 Hz
Systemforbruk:	< 0.5 W
Dimbar:	DALI
IP-grad:	IP20



25.04.2024

Med forbehold om endringer og trykkfeil.